


MEGA SOAKER

C02-070

WATER CONSUMPTION: FLOW RATES : 40-50 GPM @ 15 PSI. [150-190 LPM @ 103.4 KPA] (APPROXIMATE)

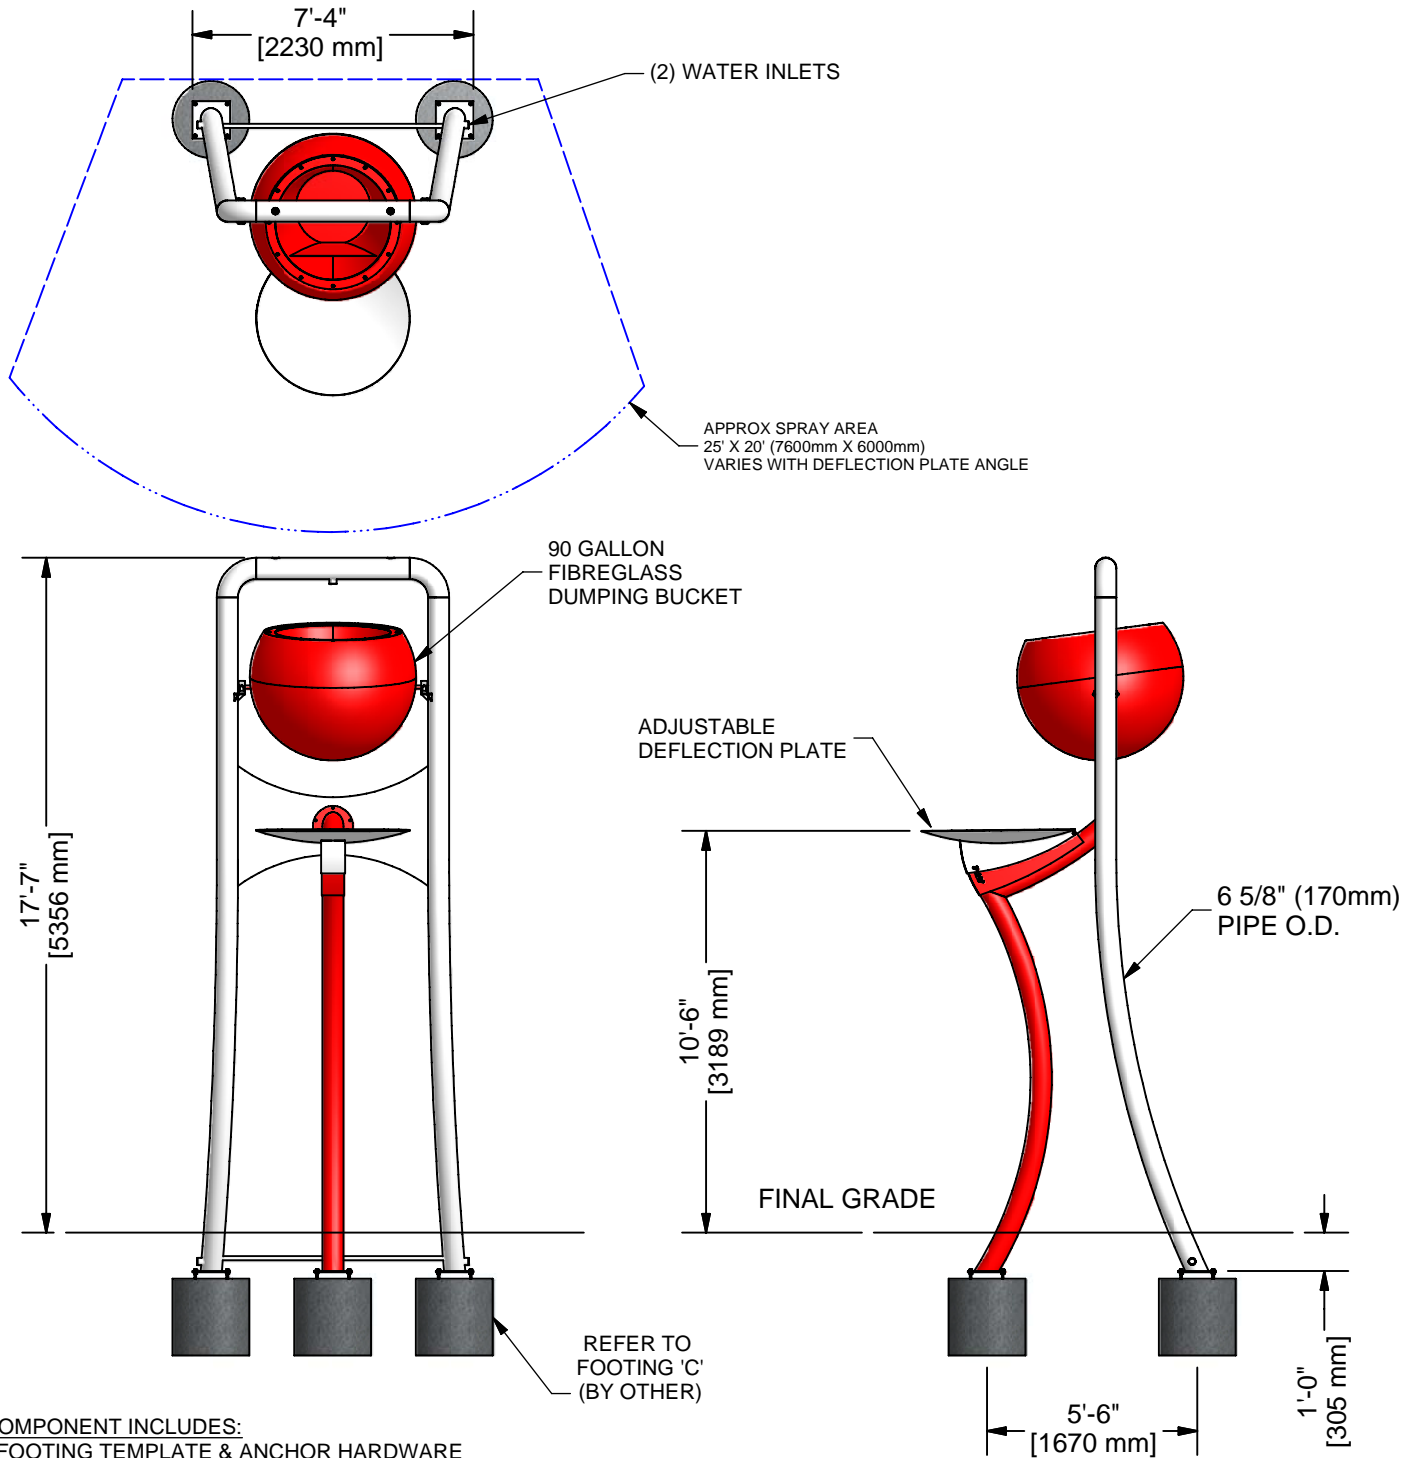

COMPONENT INCLUDES:

- FOOTING TEMPLATE & ANCHOR HARDWARE
- SERVICE TOOLS
- TAMPER RESISTANT HARDWARE

GENERAL SPECIFICATIONS

COMPONENT MATERIAL	A304 STAINLESS STEEL	SPRAY NOZZLES	CNC MACHINED ACETAL COPOLYMER WITH TAMPER RESISTANT FASTENERS.
BASE PLATE	12" SQ x 3/8" (305 mm SQ x 10 mm)	SAFETY	COMPONENT SHALL MEET ADA COMPLIANCE FOR HANDICAP ACCESSIBILITY, AND MEET OR EXCEED CURRENT ASTM F1487 & CAN/CSA-Z614 SAFETY STANDARDS
COMPONENT ANCHORING	CHEMICAL ANCHOR BOLTS		
COMPONENT GROUNDING	#6 AWG BARE CU. WIRE & AN APPROVED GRD LUG		
WATER INLET	1-1/2" F-NPT COUPLER (OTHER THREAD STNDS AVAIL)		
COATING	POLYESTER BASED POWDERCOAT		

REVISION:0



1451B Ellis Street
Kelowna, BC. V1Y 2A3
t: (250) 712-3393 f: (250)861-4814
e: design@waterplay.com w: waterplay.com

Copyright Material:
All plans & designs at all times remain the property of Waterplay Solutions Corp. ®. & cannot be used, or reproduced without written permission.

NOTE:
THIS IS A PARTIAL SPECIFICATION.
FOR FULL WATERPLAY SOLUTIONS CORP. ® PRODUCT SPECIFICATIONS, PLEASE REFER TO THE WATERPLAY SOLUTIONS CORP. ® GENERAL SPECIFICATION DOCUMENT